



Aprisa XE

POINT-TO-POINT DIGITAL MICROWAVE LINKS

300 MHz to 2.5 GHz Licensed Bands

DATASHEET [ETS1]

Aprisa XE: maximizing spectrum use and making challenging long distance links possible.


- **Efficient future-proof single-box architecture:** the Aprisa XE's built-in multiplexer and cross-connect eliminate external equipment and minimize the over-the-air requirements, with customer-configurable interface slots integrating all IP, voice and data traffic. Configuration, performance monitoring and diagnostics are easy with the 4RF embedded web-based element management system, SuperVisor.
- **High capacity:** class-leading spectral efficiency and up to 64 QAM modulation make the maximum use of the available spectrum, with industry leading capacity of up to 65.4 Mbit/s in a 14.0 MHz channel.
- **Long range:** a single Aprisa XE can link distances in excess of 150 km (100 miles), overcoming the problems of water, environmental conditions and topographical obstacles.

- **Carrier-class performance:** Aprisa XE links are engineered to achieve 'five 9s' availability, benefiting from state of the art forward error correction and inherent low latencies, for unrivalled quality of service.
- **Cost effective:** the Aprisa XE has a low total cost of ownership, providing a rapid return on investment by minimizing both capital and operational expenditure.
- **Redundancy options:** Monitored Hot Standby and Hitless Space Diversity are available for protection in mission-critical applications.
- **Reliable:** the Aprisa XE has an actual MTBF over 95 years. Deployed in over 150 countries, it can be relied upon to perform in the harshest and most remote environments.

In Brief

- 300 MHz, 400 MHz, 600 MHz, 800 MHz, 900 MHz, 1.4 GHz, 1.8 GHz, 2.0 GHz and 2.5 GHz licensed bands
- Built-in cross-connect and multiplexer
- Up to 65.4 Mbit/s capacity
- 25 kHz, 50 kHz, 75 kHz, 125 kHz, 150 kHz, 200 kHz, 250 kHz, 500 kHz, 1.0 MHz, 1.35 MHz, 1.75 MHz, 3.5 MHz, 7.0 MHz and 14.0 MHz channel sizes
- QPSK to 64 QAM modulation
- Range of 150+ km (100+ miles)
- Industry-leading reliability
- Web server and SNMP management
- All voice, data and IP applications
- MHSB and HSD protection options

Future-proof single-box architecture

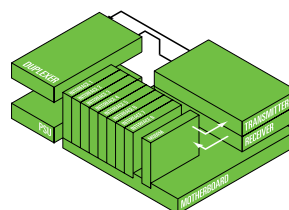

Aprisa XE

POINT-TO-POINT DIGITAL MICROWAVE LINKS

DATASHEET [ETSI] 300 MHZ TO 2.5 GHZ LICENSED BANDS



Specifications

RF	Band (MHz)	Tuning Range (MHz)	Synthesizer Step Size (kHz)
Frequencies	300	300 – 400	6.25
	400	394 – 460	5.0
	400	400 – 470	6.25
	600	620 – 715	12.5
	800	803 – 890	12.5
	900	850 – 960	12.5
	1400	1350 – 1550	12.5
	1800	1700 – 2100	62.5
	2000	1900 – 2300	62.5
	2500	2300 – 2700	62.5
Modulation Types	Software configurable: QPSK / 16 / 32 / 64 QAM		
Frequency Stability	Short term ± 1 ppm (environmental effects and power supply variations) Long term ± 2 ppm (aging of crystal oscillators \approx over 5 years)		
Antenna Connection	N-type female 50 ohm		

Transmitter Power Output	300 – 1800 MHz	2000 – 2500 MHz
QPSK	+21 to +35 dBm	+20 to +34 dBm
16 QAM	+17 to +31 dBm	+17 to +31 dBm
32 QAM	+16 to +30 dBm	+16 to +30 dBm
64 QAM	+15 to +29 dBm	+15 to +29 dBm

Receiver			
Maximum Input Level	-20 dBm		
Dynamic Range	58 to 87 dB at 10^{-6} BER		
C/I Radio	Co-Channel	QPSK	better than 16 dB
		16 QAM	better than 20 dB
		32 QAM	better than 23 dB
		64 QAM	better than 27 dB
		First adjacent channel	
	Second adjacent channel		better than -30 dB

Aprisa XE

POINT-TO-POINT DIGITAL MICROWAVE LINKS

DATASHEET [ETSI] 300 MHZ TO 2.5 GHZ LICENSED BANDS



Duplexer (bandpass)	TX / RX Split (MHz)	Frequency Bands (MHz)
500 kHz	≥ 5	300, 400
2.0 MHz	≥ 9.45	300, 400
3.5 MHz	≥ 20	300, 400
7.0 MHz	≥ 45	600
	≥ 40	800, 900
	≥ 48	1400
14.0 MHz	≥ 47.5	1800
	≥ 91	2000
	≥ 74	2500

Power Supply	
	115 / 230 VAC, 50 / 60 Hz
Input Range	±12 VDC (10.5 – 18 VDC), ±24 VDC (20.5 – 30 VDC), ±48 VDC (40 – 60 VDC) +12 VDC (10.5 – 18 VDC) Low Power Option
Power Consumption	Dependent on frequency band, power supply, transmitter output power and interface cards fitted 115 / 230 VAC, ±12 VDC ±24 VDC, ±48 VDC 39 – 167 W input power Low Power Option (12 VDC) 29 – 53 W input power

Interfaces	
Ethernet Ports	Integrated 4-port 10 / 100Base-T switch with port-based rate limiting, VLAN tagging and QoS Support
E1 / T1	Quad 120 ohm G.703 / G.704
Data	Quad V.24 asynchronous, synchronous and over sampling mode Single synchronous X.21 / V.35 / RS-449 / RS-530
Analogue	Dual 2-wire FXS / FXO (POTS); Quad 4-wire E&M

Auxiliary Interfaces	
Alarms	4 external alarm outputs, 2 external alarm inputs
Configuration	Embedded web server with SNMP
Management	Ethernet interface for SuperVisor and SNMP, V.24 setup port
RSSI	Front panel test point

Environmental	
Operating	-10° C to +50° C (+14° F to +122° F)
Storage	-20° C to +70° C (-4° F to +158° F)
Humidity	Maximum 95 % non-condensing

Aprisa XE

POINT-TO-POINT DIGITAL MICROWAVE LINKS

DATASHEET [ETSI] 300 MHZ TO 2.5 GHZ LICENSED BANDS



Mechanical	
Rack Mount	19" 2U high (internal duplexer)
Weight	10 kg (23 lbs) typical

Protected Options	
MHSB	≤ 4 dB splitter / cable loss, ≤1 dB TX relay / cable loss (system gain reduced by a maximum of 5 dB)
HSD	≤ 1 dB TX relay / cable loss, < 25 ms TX switching / hitless RX switching

Compliance	
Radio	EN 302 217-2
EMI / EMC	EN 301 489-5
Safety	EN/UL/IEC 62368-1, CB Certified, NRTL listed
Environmental	ETS 300 019-2-3 Class 3.2
RF Exposure	EN 50385

Product Range

		Channel Size													
		kHz							MHz						
		25	50	75	125	150	200	250	500	1.0	1.35	1.75	3.5	7.0	14.0
Frequency Band [MHz]	300	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
	400	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
	600											✓	✓		
	800	*	*	✓			*	✓	✓	✓		✓	✓		
	900	✓	✓	✓		✓	✓	✓				✓			
	1400			✓		✓		✓	✓	✓		✓	✓	✓	
	1800							✓	✓	✓		✓	✓	✓	✓
	2000							✓	✓	✓		✓	✓	✓	✓
	2500							✓	✓	✓		✓	✓	✓	✓

* Australia (ACMA) and New Zealand (RSM) only

Aprisa XE

POINT-TO-POINT DIGITAL MICROWAVE LINKS

DATASHEET [ETSI] 300 MHZ TO 2.5 GHZ LICENSED BANDS



System Performance

25 kHz Channel	QPSK	16 QAM	32 QAM	64 QAM
Capacity ^[1] gross (E1 + wayside)	N/A	72 (1 TS + 8) kbit/s	96 (1 TS + 32) kbit/s	112 (1 TS + 48) kbit/s
Receiver Sensitivity ^[2]	N/A	-105 dBm	-102 dBm	-99 dBm
System Gain ^[2]	N/A	136 dB	132 dB	128 dB
50 kHz Channel	QPSK	16 QAM	32 QAM	64 QAM
Capacity ^[1] gross (E1 + wayside)	80 (1 TS + 16) kbit/s	168 (2 TS + 40) kbit/s	208 (3 TS + 16) kbit/s	256 (4 TS + 0) kbit/s
Receiver Sensitivity ^[2]	-109 dBm	-103 dBm	-100 dBm	-97 dBm
System Gain ^[2]	144 dB	134 dB	130 dB	126 dB
75 kHz Channel	QPSK	16 QAM	32 QAM	64 QAM
Capacity ^[1] gross (E1 + wayside)	128 (2 TS + 0) kbit/s	264 (4 TS + 8) kbit/s	312 (4 TS +56) kbit/s	400 (6 TS + 16) kbit/s
Receiver Sensitivity ^[2]	-107 dBm	-101 dBm	-98 dBm	-95 dBm
System Gain ^[2]	142 dB	132 dB	128 dB	124 dB
125 kHz Channel	QPSK	16 QAM	32 QAM	64 QAM
Capacity ^[1] gross (E1 + wayside)	208 (3 TS + 16) kbit/s	424 (6 TS + 40) kbit/s	536 (8 TS + 24) kbit/s	640 (10 TS + 0) kbit/s
Receiver Sensitivity ^[2]	-105 dBm	-99 dBm	-96 dBm	-93 dBm
System Gain ^[2]	140 dB	130 dB	126 dB	122 dB
150 kHz Channel	QPSK	16 QAM	32 QAM	64 QAM
Capacity ^[1] gross (E1 + wayside)	264 (4 TS + 8) kbit/s	536 (8 TS + 24) kbit/s	672 (10 TS + 32) kbit/s	808 (12 TS + 40) kbit/s
Receiver Sensitivity ^[2]	-104 dBm	-98 dBm	-95 dBm	-92 dBm
System Gain ^[2]	139 dB	129 dB	125 dB	121 dB
200 kHz Channel	QPSK	16 QAM	32 QAM	64 QAM
Capacity ^[1] gross (E1 + wayside)	336 (5 TS + 16) kbit/s	680 (10 TS + 40) kbit/s	840 (13 TS + 8) kbit/s	1024 (16 TS + 0) kbit/s
Receiver Sensitivity ^[2]	-102 dBm	-96 dBm	-93 dBm	-90 dBm
System Gain ^[2]	137 dB	127 dB	123 dB	119 dB
250 kHz Channel	QPSK	16 QAM	32 QAM	64 QAM
Capacity ^[1] gross (E1 + wayside)	408 (6 TS + 24) kbit/s	824 (12 TS + 56) kbit/s	1032 (16 TS + 8) kbit/s	1240 (19 TS + 24) kbit/s
Receiver Sensitivity ^[2]	-101 dBm	-95 dBm	-92 dBm	-89 dBm
System Gain ^[2]	136 dB	126 dB	122 dB	118 dB
500 kHz Channel	QPSK	16 QAM	32 QAM	64 QAM
Capacity ^[1] gross (E1 + wayside)	792 (12 TS + 24) kbit/s	1592 (24 TS + 56) kbit/s	1992 (31 TS + 8) kbit/s	2392 (1 E1 + 304) kbit/s
Receiver Sensitivity ^[2]	-99 dBm	-93 dBm	-90 dBm	-87 dBm
System Gain ^[2]	134 dB	124 dB	120 dB	116 dB

Aprisa XE

POINT-TO-POINT DIGITAL MICROWAVE LINKS

DATASHEET [ETSI] 300 MHZ TO 2.5 GHZ LICENSED BANDS



1.0 MHz Channel	QPSK	16 QAM	32 QAM	64 QAM
Capacity ^[1] gross (E1 + wayside)	1624 (25 TS + 24) kbit/s	3256 (1 E1 + 1168) kbit/s	4072 (1 E1 + 1984) kbit/s	4888 (2 E1 + 712) kbit/s
Receiver Sensitivity ^[2]	-96 dBm	-90 dBm	-87 dBm	-84 dBm
System Gain ^[2]	131 dB	121 dB	117 dB	113 dB

1.35 MHz Channel	QPSK	16 QAM	32 QAM	64 QAM
Capacity ^[1] gross (E1 + wayside)	2200 (1 E1 + 112) kbit/s	4408 (2 E1 + 232) kbit/s	5512 (2 E1 + 1336) kbit/s	6616 (3 E1 + 352) kbit/s
Receiver Sensitivity ^[2]	-95 dBm	-89 dBm	-86 dBm	-83 dBm
System Gain ^[2]	130 dB	120 dB	116 dB	112 dB

1.75 MHz Channel	QPSK	16 QAM	32 QAM	64 QAM
Capacity ^[1] gross (E1 + wayside)	2872 (1 E1 + 784) kbit/s	5752 (2 E1 + 1576) kbit/s	7192 (3 E1 + 928) kbit/s	8632 (4 E1 + 280) kbit/s
Receiver Sensitivity ^[2]	-94 dBm	-88 dBm	-85 dBm	-82 dBm
System Gain ^[2]	129 dB	119 dB	115 dB	111 dB

3.5 MHz Channel	QPSK	16 QAM	32 QAM	64 QAM
Capacity ^[1] gross (E1 + wayside)	5720 (2 E1 + 1544) kbit/s	11448 (5 E1 + 1008) kbit/s	14312 (6 E1 + 1784) kbit/s	17176 (8 E1 + 472) kbit/s
Receiver Sensitivity ^[2]	-90 dBm	-84 dBm	-81 dBm	-78 dBm
System Gain ^[2]	125 dB	115 dB	111 dB	107 dB

7 MHz Channel	QPSK	16 QAM	32 QAM	64 QAM
Capacity ^[1] gross (E1 + wayside)	11832 (5 E1 + 1392) kbit/s	23672 (11 E1 + 704) kbit/s	29592 (14 E1 + 360) kbit/s	35512 (17 E1 + 16) kbit/s
Receiver Sensitivity ^[2]	-87 dBm	-81 dBm	-78 dBm	-75 dBm
System Gain ^[2]	122 dB	112 dB	108 dB	104 dB

14 MHz Channel	QPSK	16 QAM	32 QAM	64 QAM
Capacity ^[1] gross (E1+wayside)	23992 (11 E1 + 1024) kbit/s	47992 (22 E1 + 2056) kbit/s	59992 (28 E1 + 1528) kbit/s	65464 (28 E1 + 7000) kbit/s
Receiver Sensitivity ^[2]	-84 dBm	-78 dBm	-75 dBm	-72 dBm
System Gain ^[2]	119 dB	109 dB	105 dB	101 dB

NOTES (SYSTEM PERFORMANCE TABLES)

[1] Capacities are specified as unframed. The management Ethernet capacity must be subtracted from the gross capacity (default 64 kbit/s).

[2] Performance specified at the antenna port for 10-6 BER. Figures for 10-3 BER are typically 1 dB better.

[3] Unreleased: Please contact Aviat Networks for availability.

Interface Cards

QETH: Quad port Ethernet interface card supporting 10Base-T or 100Base-TX




The QETH is a quad port Ethernet interface card supporting 10Base-T or 100Base-TX for transport of user Ethernet traffic. The QETH features are:

- Layer 2 Ethernet / VLAN Switch conforming to 802.1D/Q supporting standard LAN networks
- Traffic segregation with transparent VLAN and per port VLAN tagging for user and management traffic.
- QoS support for tight traffic control with per packet prioritization, scheduling and priority queuing. Priority can be either per port or per packet and scheduling can be either strict priority or weighted priority. Ingress rate limiting per port (up to 8 Mbit/s) can be used to protect against buffer flooding.

Shipping weights and dims 0.15 kg, 240mm x 108mm x 32mm

QJET: QJET Quad E1 / T1 framed / unframed interface card

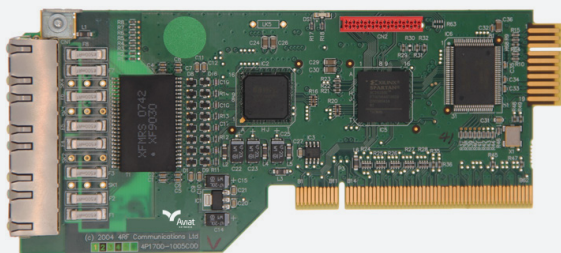


The QJET is a quad port 2 Mbit/s E1 / T1 digital interface providing unframed (G.703) and framed (G.704) interfaces. Unframed (G.703) E1 is typically used for transport of an entire E1 / T1 over the radio link.

Framed (G.704) E1 / T1 timeslots can be cross connected to:

1. Any other E1 / T1 timeslot on any other E1 / T1 interface providing transport, timeslot grooming and drop and insert functionality.
2. Analogue interface cards providing digital trunk interface connection to PBX and telephone exchanges.
3. QV24 interface cards providing synchronous over sampling circuits.

Shipping weights and dims 0.14 kg, 240mm x 108mm x 32mm

QV24: Quad V.24 serial interface card

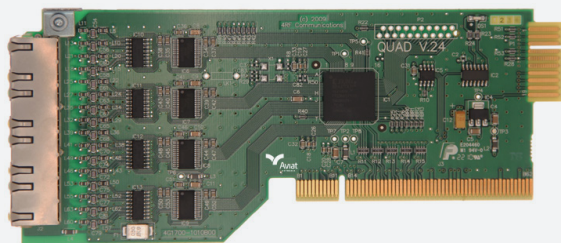

The QV24 is a quad port serial interface card providing asynchronous and synchronous V.24 data transmission.


Asynchronous mode provides V.24 circuits at data rates of 300, 600, 1200, 2400, 4800, 7200, 9600, 12800, 14400, 19200, 23040, 28800, 38400, 57600 and 115200 bit/s.

In synchronous mode, interface data is synchronously mapped to radio capacity using proprietary subrate multiplexing providing data rates of 300, 600, 1200, 2400, 4800, 9600 and 19200 bit/s. QV24 interfaces are required at both ends of the circuit.

In over sampling mode, the interface data is sampled at a fixed 64 kHz. This timeslot can be cross connected to an E1 or T1. This over sampling mode can be operated up to 19200 bit/s.

Shipping weights and dims 0.14 kg, 240mm x 108mm x 32mm

HSS: Single synchronous serial interface card

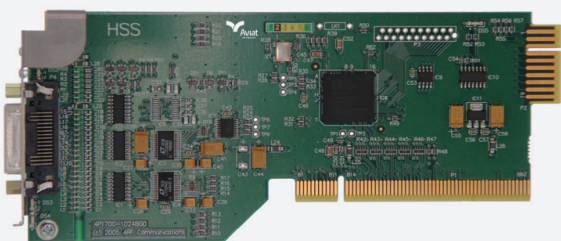

The HSS is a single port high speed serial interface card providing V.35, X.21, RS-449 and RS-530 synchronous data transmission as either a DTE or a DCE. It supports data rates of 8 to 2048 kbit/s in 8 kbit/s steps (dependent on rate selected). 8 kbit/s is used for control lines.

The interface card provides an LFH 60 connector and uses standard Cisco WAN port serial interface cables to provide the correct data interface connector.

The interface specification (X.21 / V.35 etc) is automatically changed by simply changing the type of interface cable connected to the HSS.

Shipping weights and dims 0.14 kg, 240mm x 108mm x 32mm


Aprisa XE

POINT-TO-POINT DIGITAL MICROWAVE LINKS

DATASHEET [ETSI] 300 MHZ TO 2.5 GHZ LICENSED BANDS



Q4EM: Quad 4 wire E&M interface card

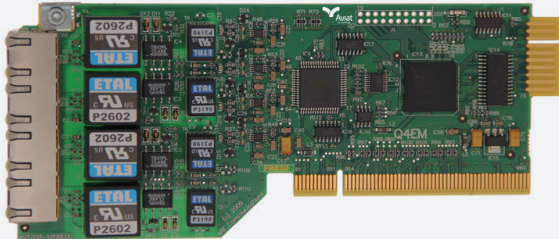

The Q4EM is a quad port analogue interface card providing a 4 wire analogue circuit and single E&M signalling.

The Q4EM digitizes analogue signals using either 64 kbit/s PCM (G.711-compliant) or 32, 24 or 16 kbit/s ADPCM compression (G.726-compliant), providing phone-quality voice transmission. Channel Associated Signalling (A bit) is used to signal between the interfaces.

The Q4EM E&M signalling leads are optically isolated, bi-directional lines which can be externally referenced to meet any of the EIA-464 connection types I, II, IV or V.

Shipping weights and dims 0.18 kg, 240mm x 108mm x 32mm

DFXO: Dual 2 wire loop signalling foreign exchange office (FXO) interface card




The function of FXO / FXS two wire loop interface circuits is to transparently extend the 2 wire interface from the exchange line card to the telephone / PBX, ideally without loss or distortion. These circuits are known as 'ring out, dial in' 2 wire loop interface circuits. The DFXO interface simulates the function of a telephone.

The DFXO digitizes analogue signals using either 64 kbit/s PCM (G.711-compliant) or 32, 24 or 16 kbit/s ADPCM compression (G.726-compliant), providing phone-quality voice transmission. Channel Associated Signalling (ABCD bits) is used to signal the remote DFXS.

Line and balance impedances are synthesized with high-performance DSP architecture.

Shipping weights and dims 0.14 kg, 240mm x 108mm x 32mm

DFXS: Dual 2 wire loop signalling foreign exchange subscriber (FXS) interface card

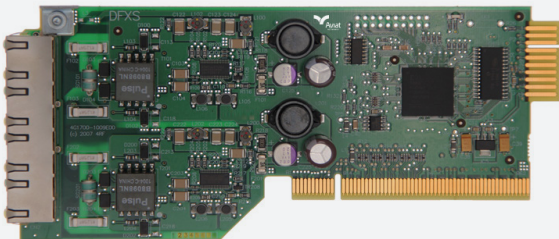

The function of FXO / FXS two wire loop interface circuits is to transparently extend the 2 wire interface from the exchange line card to the telephone / PBX, ideally without loss or distortion. These circuits are known as 'ring out, dial in' 2 wire loop interface circuits. The DFXS interface simulates the function of an exchange line card.

The DFXS digitizes analogue signals using either 64 kbit/s PCM (G.711-compliant) or 32, 24 or 16 kbit/s ADPCM compression (G.726-compliant), providing phone-quality voice transmission. Channel Associated Signalling (ABCD bits) is used to signal the remote DFXO.

Line and balance impedances are synthesized with high-performance DSP architecture.

Shipping weights and dims 0.16 kg, 240mm x 108mm x 32mm

Disclaimer

This material is for informational purposes only and does not constitute a legal obligation to deliver any product, feature or functionality and should not be relied upon in making purchasing decisions. All specifications are subject to change without notice. The development, release and timing of any features or functionality described for our products is at Aviat Networks' sole discretion.

For details of availability, Please contact your Aviat Networks Sales Representative.

Aviat, Aviat Networks and the Aviat logo are trademarks or registered trademarks of Aviat Networks, Inc.
Copyright © Aviat Networks, Inc. [2024] All Rights Reserved. Data subject to change without notice.